

**Save Space • Save Energy • Reduce Fire Hazard**

# Protect Transition Duct

# the dryerbox®

Today, you can place the dryer flush against the wall without crushing the exhaust hose or restricting airflow.

Install the Dryerbox® for more spacious, more efficient and safer homes.

- Eliminate One Elbow
- Gain 6' of Allowable Duct Run
- Reduce Call Backs

*Protect Transition Hose Neatly in the Wall*



Unprotected Hose is a Fire Hazard

Model 480 — 22 Gauge Aluminized Steel Shown Painted



**NEW**  
Model 480

Exhaust Direction	Wall Size	Model Number
Both	2x6	DB-480
Upward	2x6	DB-425
Upward	2x4	DB-350
Downward	2x6	DB-4D
Downward	2x4	DB-3D

## Finish the Laundry Right

Protecting flex hose lessens the risk of lint buildup, provides energy savings by removing the kinks usually found in the exhaust hose, and makes for a simpler, more professional looking finish.

**In-O-Vate**  
Technologies Inc

**888-443-7937**



810 Saturn Street • Suite 20 • Jupiter FL 33477 • Phone: 561-743-8696 • Fax: 561-745-9723

**www.Dryerbox.com**





# Technical Product Specifications



480 - Up, Down / Pedestal, Stand-alone

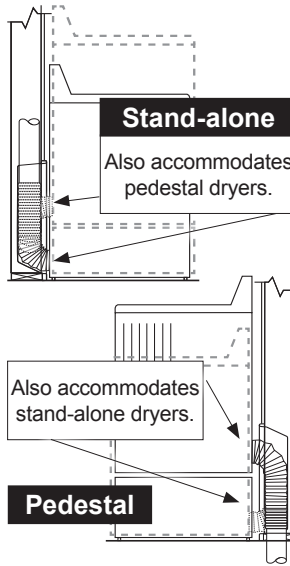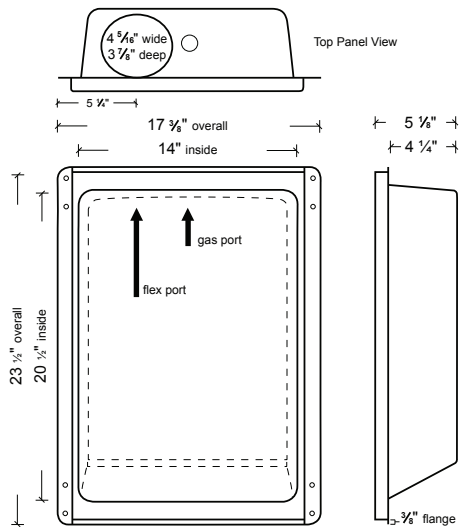

425 / 350 - Upward Venting

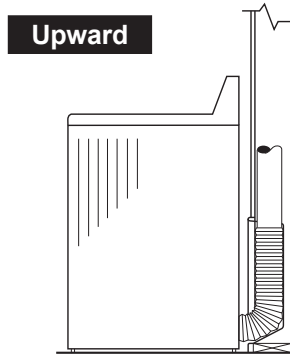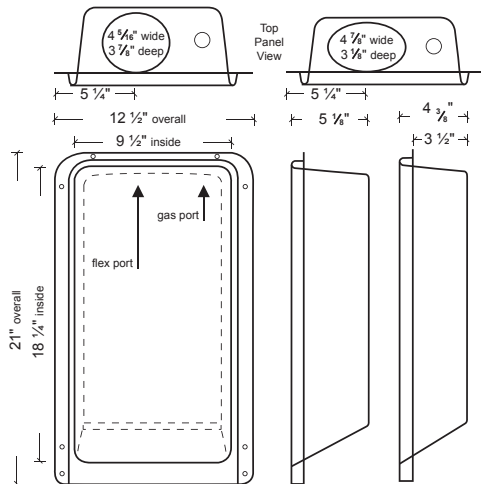

4D / 3D - Downward Venting

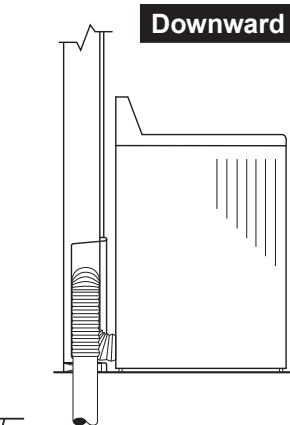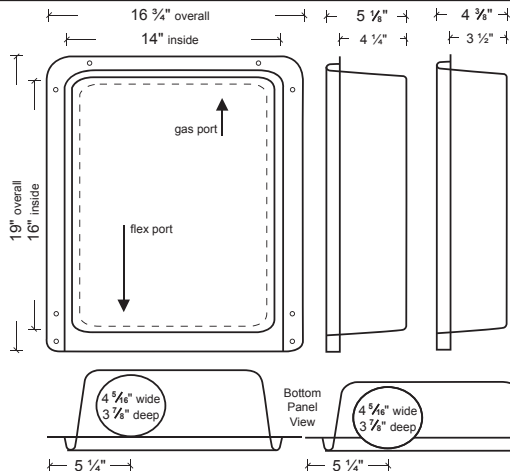

Model Number	Wall Size	Exhaust Direction
480	2X6	Up & Down
425	2X6	Upward
350	2X4	Upward
4D	2X6	Downward
3D	2X4	Downward

## Performance Data

### For Use:

- Dryer vent hose receptacle
- Doubles as gas connection receptacle
- Meets code requirements as a clean-out

### Materials:

- Model 480, 425 and 350 deep drawn with .028 aluminized steel (22 gauge)
- Model 4D and 3D deep drawn with .031 aluminized steel (21 gauge)
- UL Classified for a one hour wall (480 pending)



Cabinets

For Use in Penetration Firestop Systems  
See UL Directory of Products Certified for  
Canada and UL Fire Resistance Directory  
**<25XC>**

US Patents 5,476,183, 6,419,102 and 7,731,045

## General Information

### Benefits:

- Locate the dryer right up against the wall
- Flex is protected from getting crushed
- Lint build-up is minimized
- Efficiency is increased...clothes dry faster
- Dryer related service calls are almost eliminated
- Laundry room appears larger to prospects
- Reduces the fire hazard
- Reduces mold potential in the wall

### Features:

- No trim-ring piece is needed
- Elbow eliminator...gain 5 foot of duct run
- Surface is paintable, no masking needed
- Applauded by Mechanical Inspectors
- Over 2 MILLION Dryerboxes installed
- Convenient Duct Support Tab

## Manufactured By

**In-O-Vate Technologies, Inc.**

810 Saturn Street, Suite 20

Jupiter, FL 33477

Phone: (888) 443-7937

Fax: (561) 745-9723

www.dryerbox.com