



MCMASON

MOBILE HOME & MODULAR HOUSE DOOR & WINDOW



MCMASON TECH CO., LTD.
NO.1088, GAOYANG ROAD, HECHUAN DISTRICT, CHONGQING OF CHINA.
E-MAIL: INFO@MCMASON.COM

©CHONGQINGMCMASON TECH CO.LTD

contents

Mobile Home Door	03
Steel door	04
Outswing door	
Entry door	
Combination door	
Fiberglass door	09
Storm door	10
Door color option glass option and accessories	11
Modular House Door	14
Vinyl Window & Aluminium Window	19



ABOUT MCMASON

Our management team has over 60 years of combined industry experience and knowledge, dedicated to supply professionals from construction industry worldwide with top-quality doors. Over these years, we continuously invest in R&D, production line and management, strictly abide by international standards in every process from raw materials control to packaging.

Leveraging our years of unrivalled expertise, combined with new innovative engineering, we are able to provide solutions for customers to meet any need. The breadth and scope of services combined with the highest level of integrity, are what place McMason miles ahead of the competition in this industry.

McMason Key Facts:


- 88% Customers Retention Rate
- 9/10 Customer Satisfaction Score
- 12 Average Number of Orders per Customer
- Increasing Revenue by 21%
- 60+ Overseas Markets



-STEEL DOOR

MCMason steel doors are designed to high standards of energy efficiency, security, and sturdiness without sacrificing beauty. They are available in smooth or textured steel finishes. Made to enhance your entryway and satisfy the unique taste of each homeowner, we offer a variety of rich designs with a comprehensive collection of decorative glass.

- Pre-hung Door
- Finished Door
- Wood Texture Finish
- Lock and deadbolt Prep

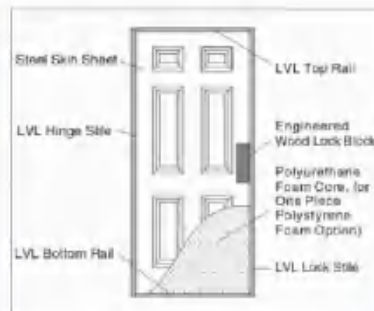

**MOBILE HOME
DOOR**

STEEL OUTSWING DOOR

STANDARD SPECIFICATIONS:

Door Materials: 24 gauge steel sheet laminated with 0.18mm vinyl film
 Door Core: Polystyrene core(PE)
 Frame Materials: 18 Gauge galvanized & painted steel sheet
 Frame Type: Flange
 Lock: Lockset and deadbolt Prep
 Hinge: 4"Galvanized steel hinges

Assembly: Pre-hung
 Shipping: Plywood Pallet

SIZE

Rough opening size: 36"×80"
Actual size: 35 1/2"×79 3/4"
Door size: 1 3/8"



*Please see Page6 for more sizes and designs.

STEEL ENTRY DOOR

STANDARD SPECIFICATIONS:

Door Materials: 24 gauge steel sheet laminated with 0.18mm vinyl film
 Door Core: Polystyrene core(PE)
 Jamb Materials: 4-9/16" Composite
 Lock Prep: Lockset and deadbolt
 Hinge: 3"stainless steel hinges
 Threshold: 4-9/16" Aluminium+Composite
 Door sweep: PVC
 Optional: Brickmold (Loose)

Assembly: Pre-hung
 Shipping: Plywood Pallet

SIZE

Rough opening size: 36"×80"
Actual size: 35-1/2"×79-1/2"
Door size: 1-3/4"
Frame depth: 4-9/16"



*Please see Page6 for more sizes and designs.

COMBINATION DOOR

STANDARD SPECIFICATIONS:

Door Materials: 24 gauge steel sheet, laminated with 0.18mm vinyl film.
 Door Core: Polystyrene core(PE)
 Lock: Proxy Lockset and diebolt Prep
 Hinge: 3 stainless steel hinges
 Door Sweep: PVC
 Storm Door: Full glass / self-storing

Jamb Materials: 5 1/8" Composite
 Threshold: Aluminum

Assembly: Pre-hung
 Shipping: Plywood Pallet

SIZE

Rough opening size: 36"X80"
 Actual size: 35-1/2"X79-1/2"
 Door size: 1-3/4"
 Frame depth: 5-1/8"



*Please see layout for more sizes and designs

Model No.	MM001	MM011				MM411			
Cutout	Flush	Diamond	2064	2264	1/2 Oval	2205B	0806	220CT	2206
6' 8"	24'30"32'34" 36"38"	24'30"32'34" 36"38"	32'34"36"38"	34'36"38"	34'36"38"	34'36"38"	34'36"38"	34'36"38"	34'36"38"
Model No.	MM4601	MM212				MM301	MM311	MM302	
Cutout	/	2236CT	2205B 6'23"	0836	2236RT	2236	/	3/4 Oval	/
6' 8"	34'36"38"	34'36"38"	34'36"38"	34'36"38"	34'36"38"	34'36"38"	34'36"38"	34'36"38"	34'36"38"
Model No.	MM303	MM313	MM203	MM213					
Cutout	/	2215	/	2236					
6' 8"	34'36"38"	34'36"38"	34'36"38"	34'36"38"					

Notes: Door panel should be offset for smaller size. Customized designs and sizes are available.

-FIBERGLASS OUTSWING DOOR

STANDARD SPECIFICATIONS:

Door Materials: 1.2mm fiberglass sheet
 Door Core: Polystyrene core(PE)
 Frame Materials: 1.2mm extruded aluminum
 Frame Type: Flange
 Lock Prep: Lockset
 Hinge: 6 extruded hinges complete with stainless steel bushing
 Color: original white

Assembly: Pre-hung
 Shipping: Plywood Pallet

SIZE

Rough opening size: 36"×80"
 Actual size: 35-1/2"×79-3/4"
 Door size: 1-1/2"



*Only flush design, or flush w/glass, please see more sizes on Page 8.

-STORM DOOR

STANDARD SPECIFICATIONS:

Materials: 1.2 mm extruded Aluminium
 Glass: 3mm tempered glass
 Frame type: Flange
 Lock Prep: Lockset
 Hinge: 4 extruded hinges complete with stainless steel bushing
 Color: White

Assembly: Pre-hung
 Shipping: Plywood Pallet

SIZE

Rough opening size: 36"×80"
 Actual size: 35-1/2"×79-1/2"



please see more sizes on Page 8

Decorative Glass Option



Belice Series



Cathedral Series



Frontier Series



Florence Series



Cape Flower Series



Blinds



Injection
Moulding
Glass
Frame


Accessories



Deadbolt



Knob



Knocker



Hinge



Protector Chain



Door Sweep



Composite Frame



Composite Sills





STANDARD SPECIFICATIONS:

Door Material: 20 gauge steel sheet
 Door Core: Polyethylene core(PE)
 Frame: 16 Gauge galvanized steel
 Finish: Primer
 Lock Prep: Lockset and deadbolt
 Hinge: Non-movable hinge pin, 4 1/2" heavy-duty hinges
 Threshold: ADA compliant threshold, sweep and seal, flashing
 detaches for optional installation
 Channels: 16 gauge inverted top and bottom channels
 Closer Prep: 14 gauge reinforced steel, standard

Assembly: Pre-hung
 Shipping: Plywood Pallet

SIZE

Rough opening size: 36" x 80"
Actual size: 35-5/8" x 79-3/4"
Door size: 34-3/4" x 78-5/8" x 1-3/4"



LOCKSET & DEADBOLT READY



CLOSER REINFORCEMENT



SCREW-IN-PRN DOORFRAME



ADA THRESHOLD




POLYETHYLENE INSULATED CORE

*Only flush design, or flush w/less



VINYL & ALU WINDOW

62Vinyl Single Hung Window

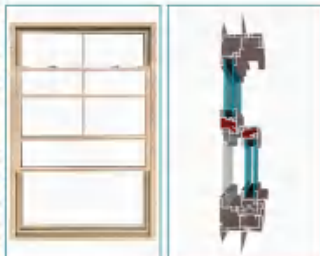

82Vinyl Single Hung Window




Features



LSM300 / 17

Features

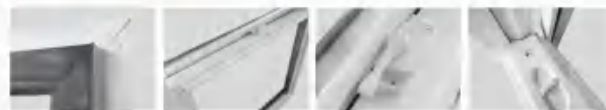

LSM300 / 15

Aluminum Window



Aluminum Shed Window

J-Top and Flush Mount Available
 Fiberglass screen
 0.154" Thinner standard glass
 Custom size available



Size	Color
1421	M/W-V/ER/BLK
1427	M/W-V/ER/BLK
1827	M/W-V/ER/BLK
1836	M/W-V/ER/BLK
2427	M/W-V/ER/BLK
2436	M/W-V/ER/BLK
3030	M/W-V/ER/BLK
3036	M/W-V/ER/BLK
3054	M/W-V/ER/BLK
3636	M/W-V/ER/BLK
3640	M/W-V/ER/BLK
3652	M/W-V/ER/BLK
4827	M/W-V/ER/BLK

Our doors are tested under the test methods:

ASTM E283-04(2012), standard test method for determining rate of air leakage.
 ASTM E330/E330M-14, standard test method for structural performance.
 ASTM E547-00(2016), standard test method for water penetration.



Qualified to be AAMA or Engery Star or NFRC certified in the U.S.

