



HAINING LIJIALONG PILE WEATHER STRIP CO., LTD
ZHEJIANG LIJIALONG BRUSH CO., LTD
ADD: NO 22 Hongqi Road, Warp Knitting Science & Technology Industrial
Zone, Haining, Zhejiang, China
Tel: +86-573-87027989 +86-573-87024299
Fax: +86-573-87047989
E-Mail: ljl@lijialong.com 8989ljl@163.com
Post Code: 314419
www.lijialong.com
www.lijialongbrush.com



LIJIALONG

LONG LAST RESILIENCE / HIGH EFFICIENCY
/ ENERGY SAVING!



The sun grants us energy and hope
The sun give us the power of growth

The cross-section of the weather strip looks like the rising sun
in the morning which because the symbolic mark of the
LIJIALONG weather strip

The company was established in 1999
And the resulting LIJIALONG spirit
"Try our utmost,Be the best of best,Achieve mutual benefit"
came out
The spirits is our LIJIALONG' s work instructions,
Product develop ambition and the source of the development of
the company.
LIJIALONG we will always be the Rising Sun in the morning.



Chronicle Of Events

manufacturer for resilient energy-saving brush



**MAKE THE WINDOW
AND DOOR
MOST DELICATE
IN THE WORLD!**

LIJIALONG


SPECIAL HIGH-ELASTIC RAW MATERIAL MAKE THE WINDOW
AND DOOR HIGH EFFICIENCY ENERGY SAVING





LIJIALONG

CHARACTERISTIC

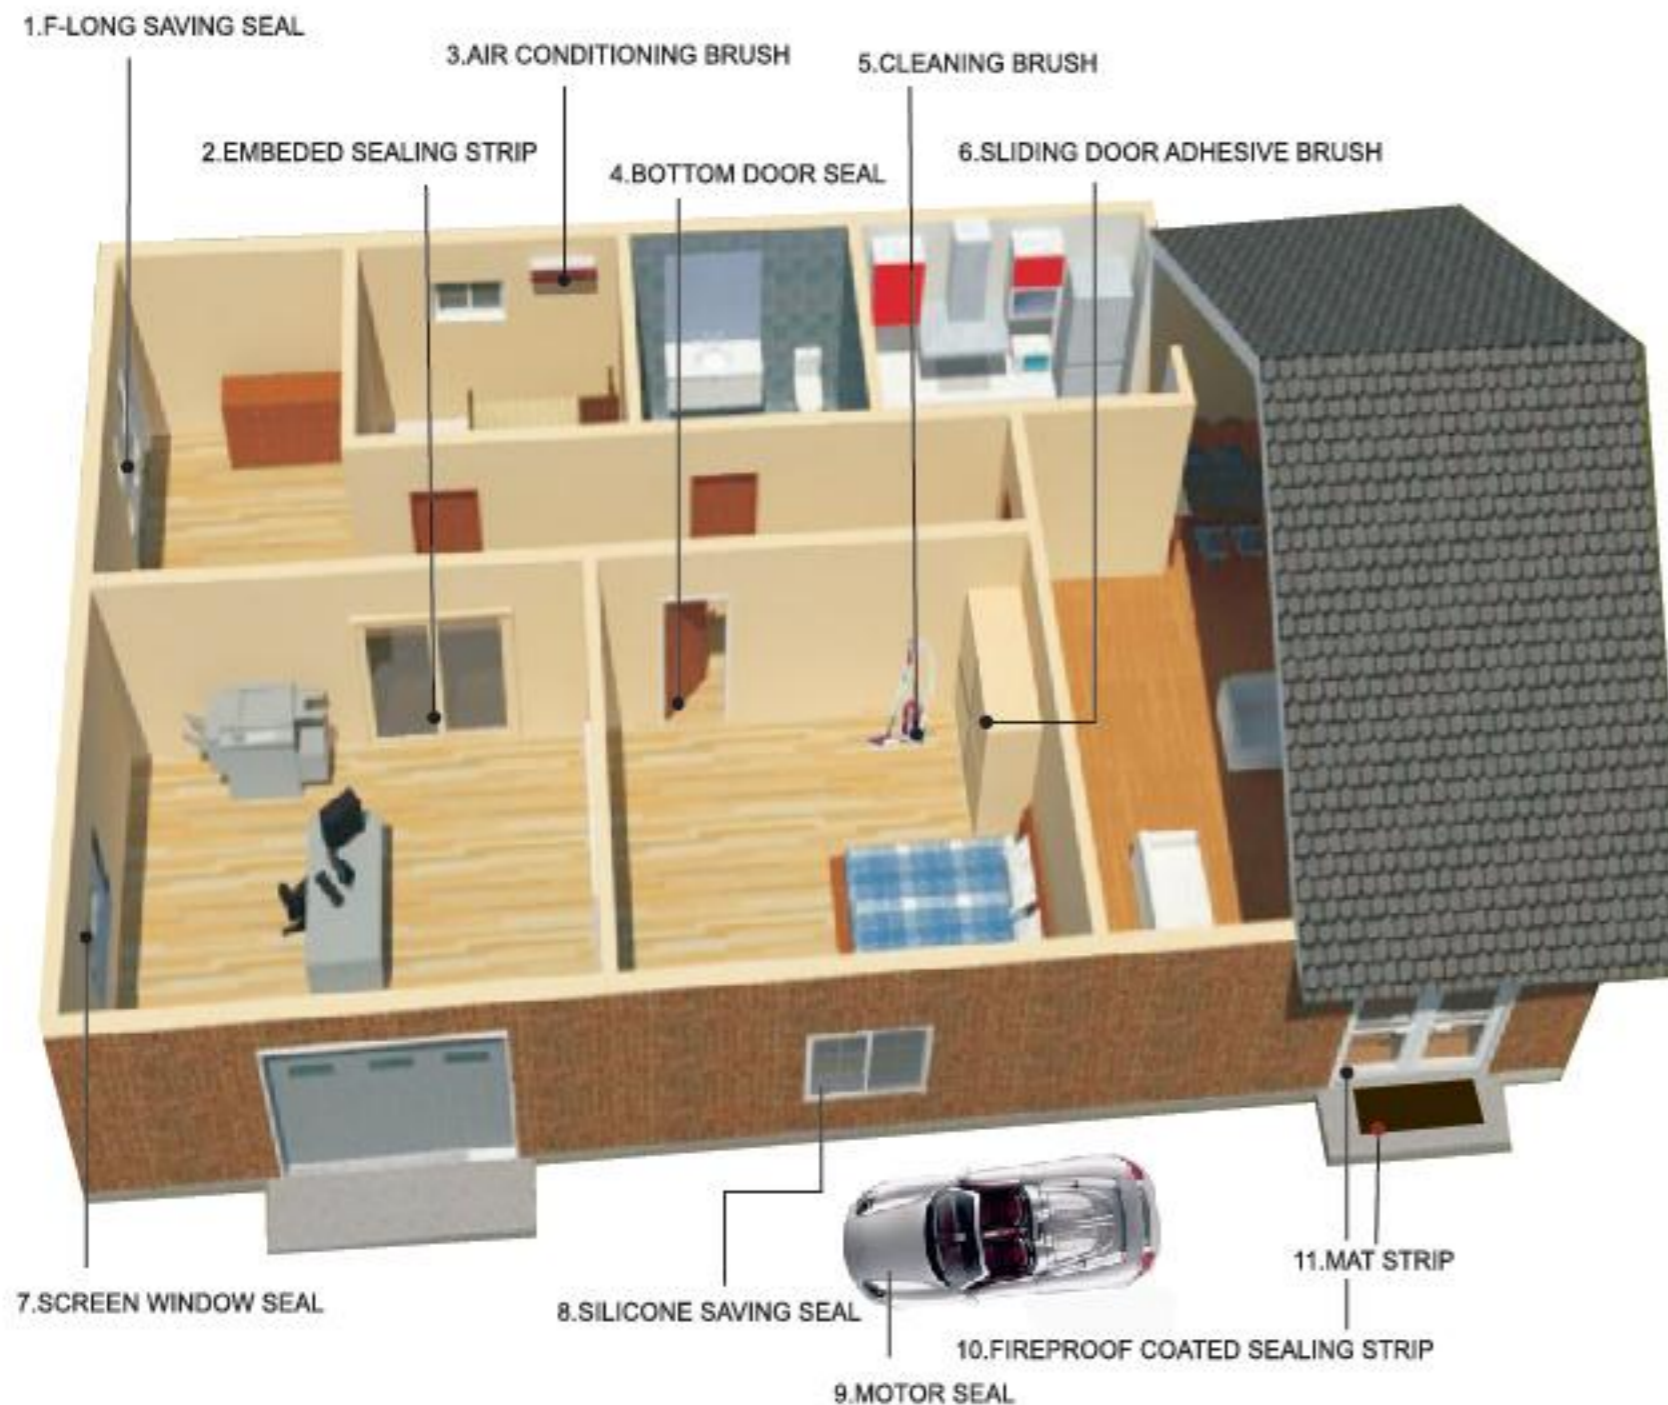


LIJIALONG UNDER THREE BRAND PRODUCT SYSTEM:

- ★ Pile weather strip for window and door include weave technique and extrusion technique
- ★ Cleaner brush
- ★ Coated sealing strip for windows, doors & more

THREE SPECIAL FEATURES

Labor-Saving 10%,Reducing waste 10%

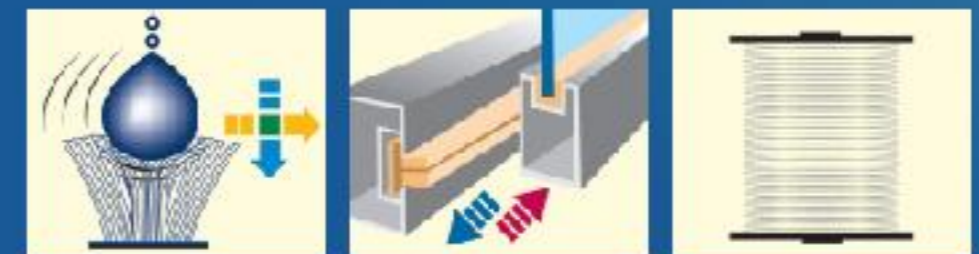

- Special high-elastic pile, perfect durability, lasting efficiency
- Technological index precise, unhindered inserting, high efficiency
- LIJIALONG Patent packing protect wool pile



SILENCE FIN SERIES

F-LONG



1. High resilience fibers with elastic fin in the middle.
2. special synthetic PP material,
3. door & window push-pull more smooth,
4. Superlative silence with 5 times longer service time than ordinary PVC



SILICONE SEAL SERIES



1. Features: high resilience fiber with silicone and anti-aging treatments. Superlative silence plastic film
2. Scope of application: apply to all profiles which meet the occupation standard of the National Construction Department.
3. Action: water-proof, dust-proof and weather-proof, wind-proof, insert-proof, keep good indoor environment.
4. Prompting: series with UV protect (pile and film both have uv) can extend service life which meets the national standards.





SELF ADHESIVE SERIES



Features:made to measure weather strip with kind of adhesive:hot melting,3M adhesive and Lohmann...Base Color can be the same as the plastic film.

Scope of application:the seals are suitable for non-groove aluminium,PVC and wooden frames

Advantage:

1.It' s easy and quick to apply.

2. it with new dense technology,high adhesive stickiness

Different colors and sizes are available for you to select in you personal options



FLEXIBLE SERIES



Features:High resilience,keep constant after 20 thousand collisions.

Scope of application:apply to replaceable profile which do not have service life request.

Action:dust-proof,insect-proof,sound-proof

Prompting:

1.series with UV protect can extend service life which meet the national standards

2.Silicone series and fin series are adopted to construction windows and doors

Dimension:base width:4-60mm,pile height:3.5mm-25mm





EMBEDDED SEAL SERIES



embedded series which could be inserted into the wood profile, and designed to hold screen material

With fishbone on double side or on either side, can easily be inserted into the profile

Features: weather strip is combined with profile

Advantage: convenient to install, easy to fix

Action: wind-proof, sound-proof, sealing

Scope of application: apply to scoop-channel wood profile

The package can cut to length or reeled.



SCREEN WINDOW SEAL SERIES




Features: PP fiber with transparent base which has high resilience

Advantage: high density and resilience, keep constant after 20 thousand collisions

Action: dust-proof, insect-proof, clean

Scope of application: apply to all kinds of screen window profile

Dimension: several base designs can be chosen, fiber angle: 30°, 45°, 60°

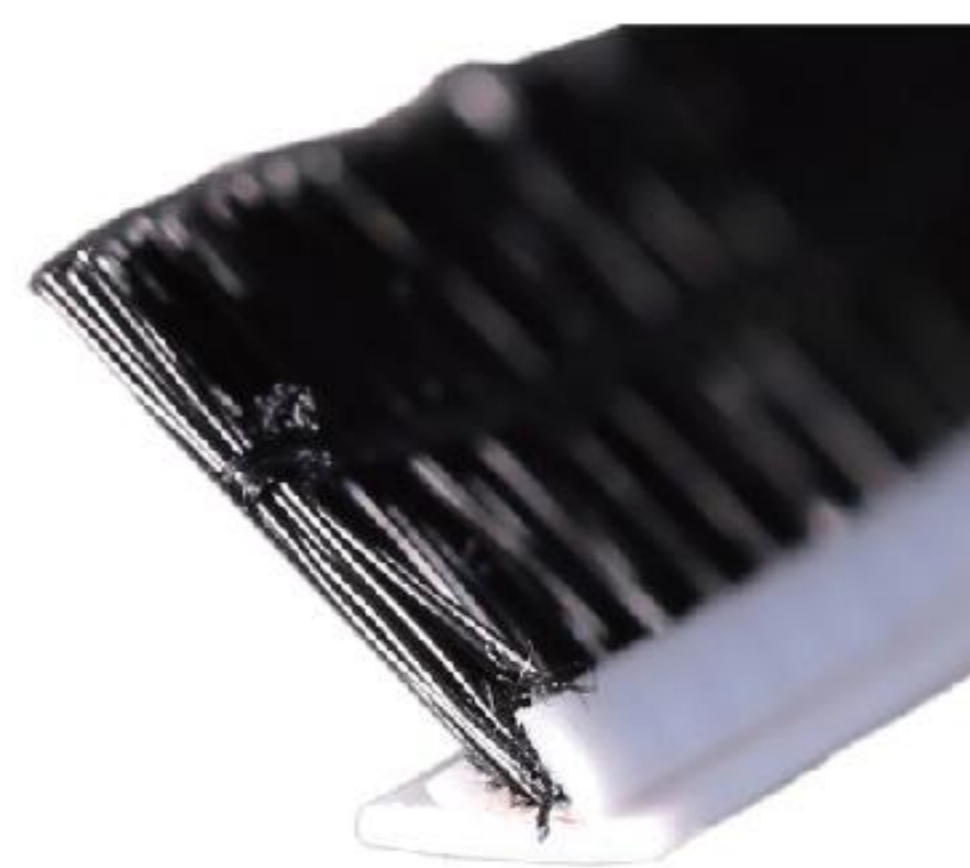



COATED SEALING STRIP SERIES

LI-LONG



1. high-elastic polyurethane inner core, high abrasion-resistant PE film coating, keep constant after 200 thousand collision
2. Low moisture uptake, low compressibility index
3. Superlative silence
4. The Colour can depend on the Design
5. Pass AAMA Certificate, UL Certificate

EXTRUSION SEAL SERIES



1. Extrusion molding process, Forming stability, Suitable of any profile
2. no possibility of off-center pile that binds, breaks or stretches in an extrusion
3. Solid polypropylene backing inserts more easily, saving time and reducing waste.
4. Labor-saving Automation equipment automatically fills extruded production lineals.



DUST SEAL SERIES



Features:made to measure weather strip with high resilience,
glue kinds:environmental hot-melting glue or genuine 3M glue.

Advantage:

- 1.High density and resilience,keep constant after 20 thousand collisions.
- 2.special die cutting ,convenient to use, saving time and reducing waste.
- 3.The package can cut to piece or reeled.

Action:dust-proof,insect-proof,sound-proof,buffering

Scope of application:apply to kinds of plastic profiles and sealing for windows and doors.

Dimension:can be produced in accordance with the profile



LIJIALONG

Lijialong subration-- professional cleaner brush develop


U-RESILIENT®

— UNBENDING BUT RESILIENT

Development of special nylon materials. With the hard characteristics, so it can play the beating function, the rotation will be embedded in the cracks in the junk vibration, raised, conducive to vacuum effect. Especially for the deep play solid waste energy-saving vacuum. Has a super rebound function, after 50,000 times' use without distortion.



U-RESILIENT

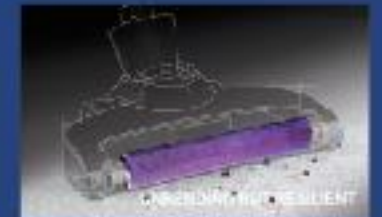

UNBENDING BUT RESILIENT

F-RESILIENT®

— FLUFFY AND RESILIENT

Special nylon can be expanded and bent but is still highly resilient. In the rotation, it plays a sweeping function, can adapt to a variety of granular and powder cleaning. With strong rebound function, after 40,000 times' use without distortion.



F-RESILIENT



FLUFFY AND RESILIENT

S-RESILIENT®

— SUPPLE AND RESILIENT

The use of ultra-fine nylon with a special elastic treatment, which is flexible and no rebound deformation. When spinning, the weather strip plays a rubbering role. After use, it leaves no traces, keep bright and clean.



S-RESILIENT



SUPPLE AND RESILIENT

MANUFACTURER FOR
RESILIENT ENERGY SAVING BRUSH





MORE OPTIONS



- | | | |
|--------------------------------------|---------------------------------------|-------------------------------------|
| 1. PB-Standard elastic straight pile | 5. BF-LONG Double pliable barrier FIN | 9. BS-Screen window seal |
| 2. SP-Silicone saving pile | 6. TF-LONG Three pliable barrier FIN | 10. MPA-Angel screen seal |
| 3. MT-Colour base | 7. FP-X Baseskirt seal | 11. Laser Print Special Requirement |
| 4. F-LONG Superlative elastic FIN | 8. FP-U Baseskirt seal | 12. AD-SM special gule |

FOR THE ULTIMATE IN PERFORMANCE, CHOSE LI-LONG COATED SEALING STRIP FROM LIJIALONG


- 1.CD0602 2.CD0801 3.CD0701 4.KS00101
 5.KHI0001 6.KSO1401 7.KHI0301 8.KHI0601-ST
 9.EMBEDDED SEAL

MAKE THE WINDOW AND DOOR SAVE ENERGY



PRODUCT SPECIFICATION


1.This form is applicable to weather strip-flexible series,silicone series,with Fin series,self-stick series

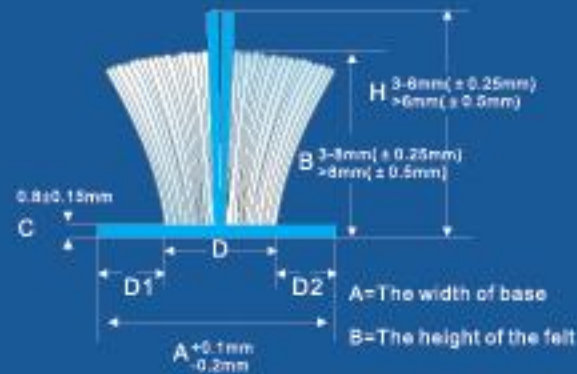

Series	A	Tolerance of width	B	Tolerance of height
mm	mm		mm	
5	4.6-5.3	+0.1/-0.2	3-25	<8,+/-0.25; >8,+/-0.5
6	5.4-6.3	+0.1/-0.2	3-25	<8,+/-0.25; >8,+/-0.5
7	6.4-7.3	+0.1/-0.2	3-25	<8,+/-0.25; >8,+/-0.5
7.5	7.4-7.7	+0.1/-0.2	3-25	<8,+/-0.25; >8,+/-0.5
8	7.8-8.3	+0.1/-0.2	3-25	<8,+/-0.25; >8,+/-0.5
8.5	8.4-8.7	+0.1/-0.2	3-25	<8,+/-0.25; >8,+/-0.5
9	8.8-9.3	+0.1/-0.2	3-25	<8,+/-0.25; >8,+/-0.5
11	10.8-11.3	+0.1/-0.2	3-25	<8,+/-0.25; >8,+/-0.5


2.screen series

Dimension:several base designs can be chosen,fiber angle:30°,45°,60°

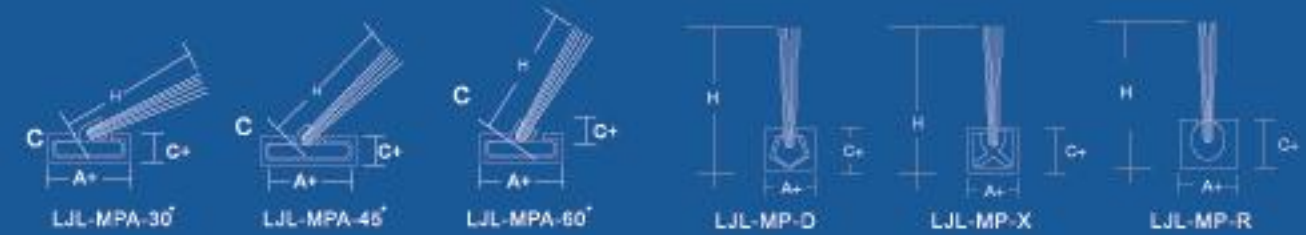


3.Coated sealing strip

Every size depend on the design








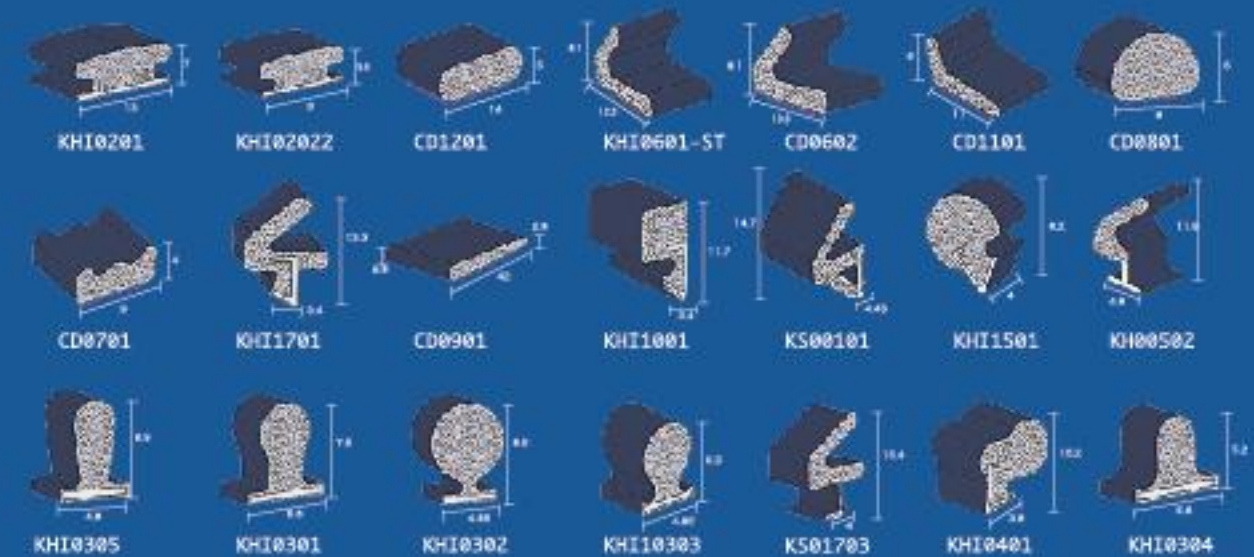


SATISFY PACKAGE REQUIREMENTS OF ALL THE COUNTRIES

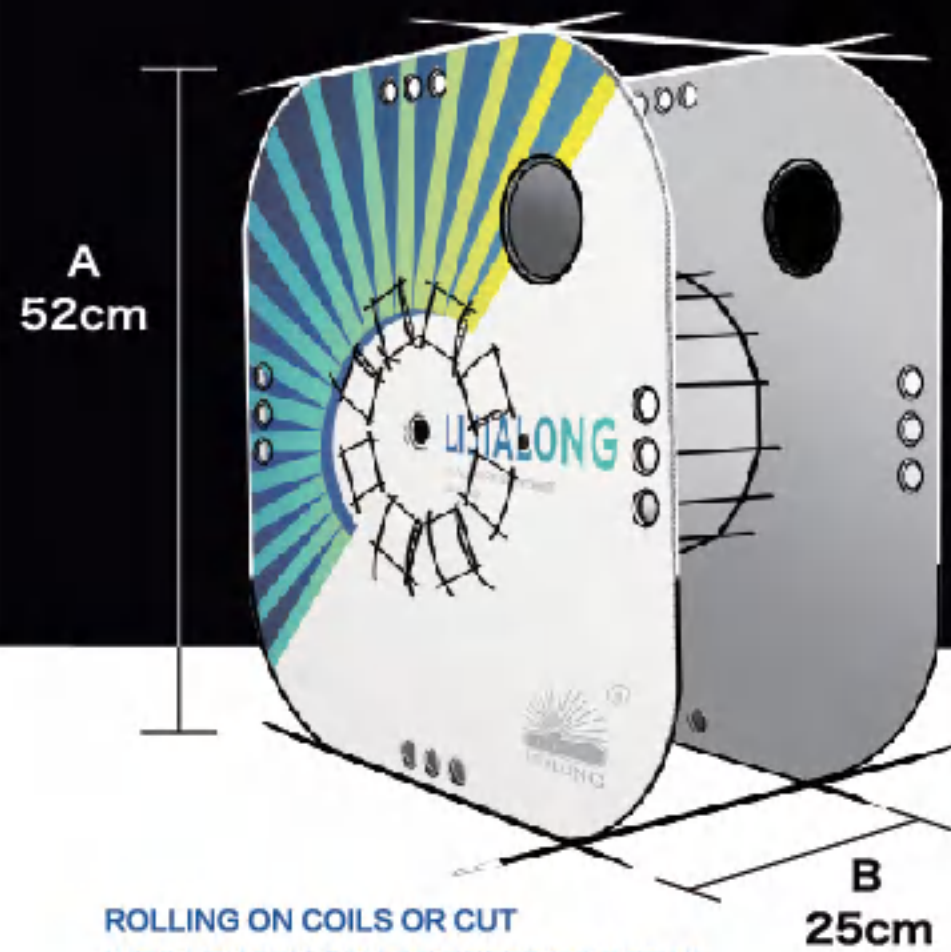

ROLLING ON COILS OR CUT INTO LENGTH CAN BE REFER TO DETAIL CUSTOMER'S DEMAND

Customized packing, Always focus on LIJIALONG patent rolling method to protect the fiber from crushed

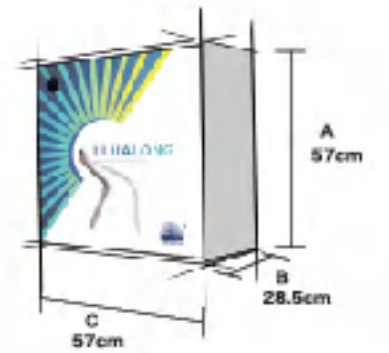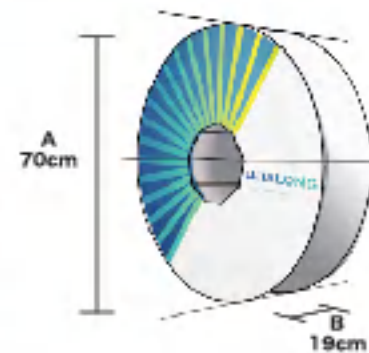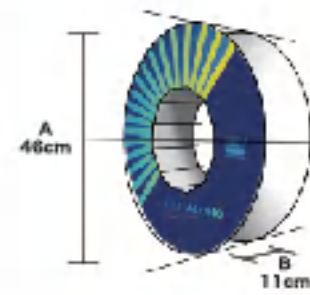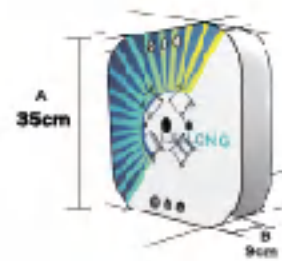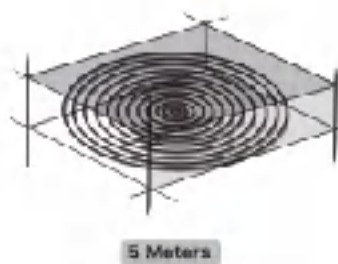



STRICT TREATMENTS

Zhejiang LIJIALONG brush improved standard and process with strict quality system; a unique international standard operating system and product features. the fundamental guarantee for flexible energy-saving brush

STRICT OPERATION PROCESS

1. Two production base
2. More than 200 producing lines
3. Daily output over 2,700,000 meters




Refined Resilient Yarn



Exquisite Weaving



Accurate Cutting



Inspection For All Process



Exquisite Retreatment

Serving The World's
5800 Windows And Doors
Enterprise

Make the window
and door most
delicate in the world

Lijialong 3 guarantees for quality control

1. evaluate and inspected by quality control department for the whole production progress

2. Self-inspect by operators

3. Sales department order review, products samples

Vital tracking points for quality control



Look Foward To Your Participation